




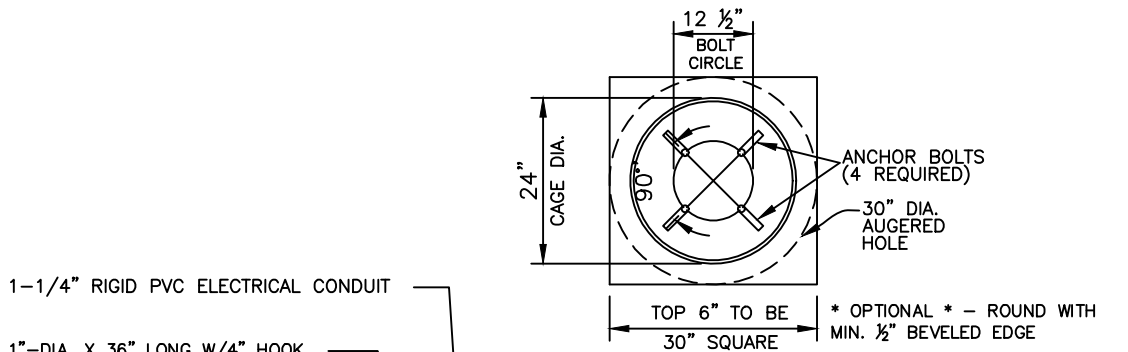

PLAN VIEW

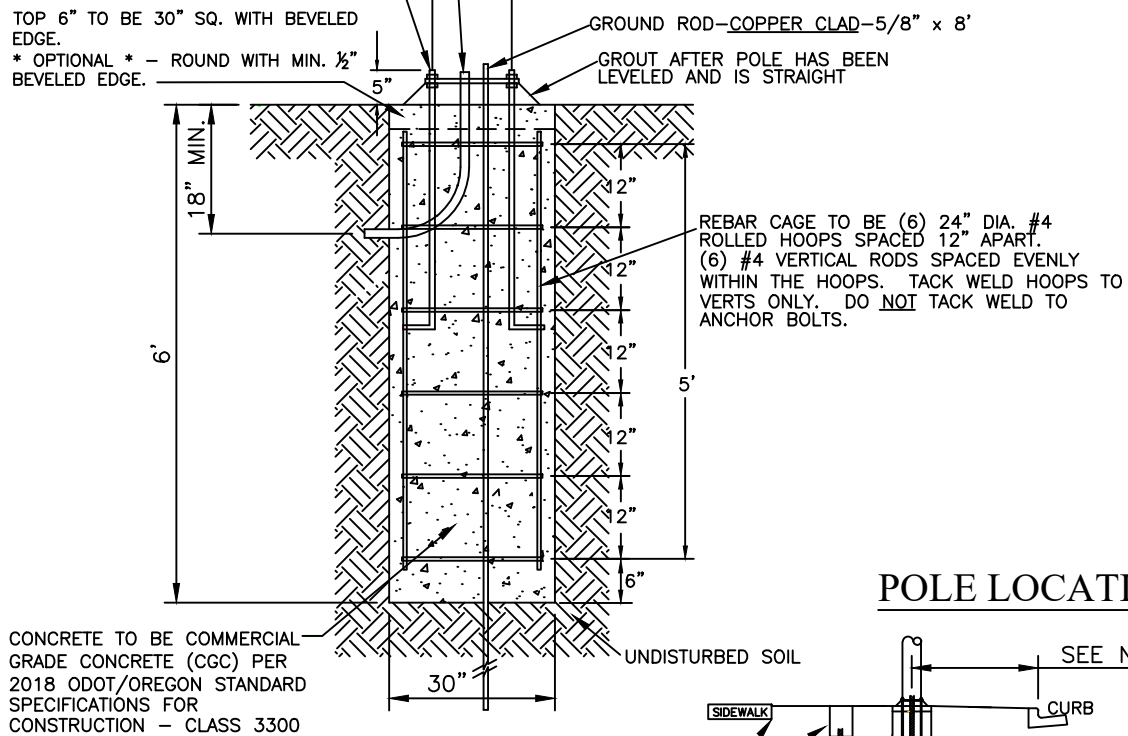

POLE LOCATION

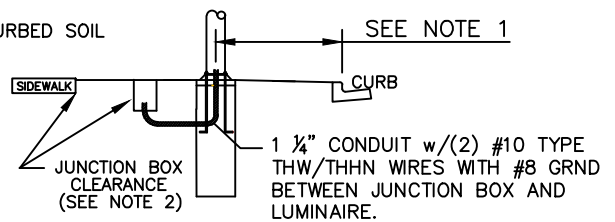

NOTES

SECTION

1. SET CENTER OF POLE 4'-6" BEHIND FACE OF CURB IN PLANTER STRIP OR MIN. OF 5'-2" BEHIND F.C IF SIDEWALK ADJACENT TO CURB. SIDEWALK SHALL HAVE A MIN. OF 4' CLEARANCE FOR ADA REQUIREMENTS. ANCHOR BOLTS SHALL HAVE A MIN. 6" OF CONCRETE AROUND THE BOLTS WITHIN A MONOLITHIC POUR OF THE SIDEWALK WITH CONTRACTION JOINTS.
2. SET JUNCTION BOX IN PLANTER STRIP DIRECTLY BEHIND FOUNDATION WITH MIN 32" OF CLEARANCE FROM SIDEWALK OR BEHIND SIDEWALK IF SIDEWALK IS ADJACENT TO CURB IF R/W AND/OR PUE ALLOWS.
3. IF CONCRETE IS POURED TO FORMS THEN COMPACT BY MECHANICAL MEANS IN 6" MAXIMUM LIFTS TO UNYIELDING.

* Anchor Bolts to be F1554GR55

TYPE 'A' AND 'C' STREET LIGHT FOUNDATION

ISSUED: LB	DATE: 9/27/05	PUBLIC WORKS ENGINEERING	DRAWING NO. CD972
CRZ	7/28/05		
REVISED: MC	DATE: Jan. 2022		